

TYREinflate 830

TYREinflate 830 OTI 830



Digital Auto Stop

Automatic stop function when the preset pressure is reached



Deflator Valve

For deflating too much air



Светодиодный фонарик

Easy to operate even in the dark and in reduced visibility conditions



Inflation Time

Can inflate a 13" tyre in approx. 2 minutes and a 15" tyre in approx. 5 minutes²⁾³⁾

Техническое описание продукта



Large Vehicle Digital Tyre Inflator

The OSRAM TYREinflate 830 has been specially developed for use with larger vehicles and their tyres, making it ideal for cars, caravans, motorhomes, off-road vehicles, minibuses and vans. This tyre inflator can inflate a 13" tyre in approx. 2 minutes and a 22" tyre in approx. 5 minutes²⁾3). The auto stop function and the deflator valve help to keep the tyres optimally inflated. This can also reduce the risk of over- or under-inflation and the resulting possible damage to the tyres. The TYREinflate 830 has a 4-metre power cable for the accessibility to all four tyres and plugs directly into your vehicle's 12-volt socket. The backlit LED display and integrated LED light provide improved readability of the pressure settings and improved illumination of the working area even in reduced visibility conditions or at night. Also included are three adapters for inflating sports balls and other small inflatables and a storage bag to protect the unit and store it neatly. OSRAM offers a 2-year guarantee¹⁾ on this product. 1) For precise conditions please refer to: www.osram.com/am-guarantee2) Based on inflating a 13" tyre from flat to 2.4 BAR /22" tyre from flat to 2.6 bar3) Measurements of the tyre pressure and inflation of the tyres to the optimum tyre pressure must always be conducted on cold tyres

Техническое описание продукта

Technical data


Информация о продукте

Номер заказа	OTI830
Время накачки шины	2 min
Максимальное значение давления	5.5 bar
Длина воздушного шланга	85 cm
Дефлятор	Да
Длина кабеля питания	4 m
Время зарядки (ч)	N/A
Светодиодная подсветка	Да
Размер экрана	40 x 40 mm
Единицы измерения	PSI, kPa, bar
Предустановленные функции	Да
Автоматическая остановка	Да
Чехол для хранения	Да
Точность (бар)	±0.1 bar
Производительность (л/мин)	40-43 l/min

Электрические параметры

Номинальная мощность	18000 Вт
Номинальное напряжение	120 В
Напряжение сети	12 V
Источник питания	12 V Fused Plug

Размеры и вес

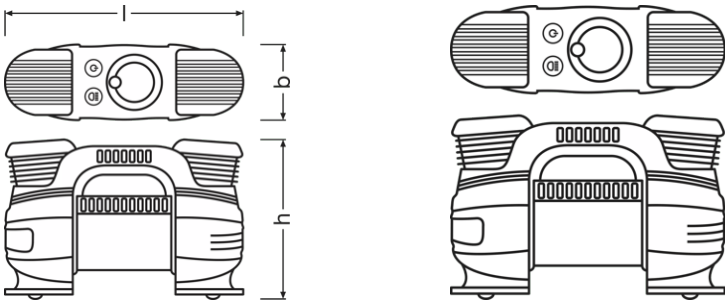

Длина	2500 mm
Ширина	1500 mm
Высота	1000 mm

Техническое описание продукта

Дополнительные данные

Тип дисплея	Digital
Уровень шума (дБ)	90 dB
Рекомендуется использовать с	Motorbike, Car, Small Van
Дополнительно	3 Piece Adaptor Kit

Возможности / мощности

Комплектующие / аксессуары	Adaptors for: Balls, Air Mattress, Bikes
Предохранитель	15 A

Классификация

Номер заказа	OTI830
--------------	--------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	07-03-2024
Primary Article Identifier	4062172294492
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	370c6b6d-841b-4ec5-8420-c49baafca26b

Данные для заказа

Product code	Описание продукта	Упаковка (цена/шт.)	Размеры (длина x ширина x высота)	Объем	Вес брутто
4062172294492	TYRE inflate 830	Folding carton box 1	300 mm x 125 mm x 190 mm	7.13 дм³	2650.00 g
4062172294508	TYRE inflate 830	Shipping carton box 3	390 mm x 316 mm x 222 mm	27.36 дм³	8200.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Загрузка данных

Файл



Соответствие стандартам

1) For precise conditions please refer to: www.osram.com/am-guarantee 2) Based on inflating a 13" tyre from flat to 2.4 BAR / 22" tyre from flat to 2.6 bar 3) Measurements of the tyre pressure and inflation of the tyres to the optimum tyre pressure must always be conducted on cold tyres

Application advice: For more detailed application information and graphics please see product datasheet and the user instruction.

Рекомендации по применению

Для получения дополнительной информации и изображения продукции, пожалуйста, ознакомьтесь с инструкцией.

Примечание

В заказ могут быть внесены изменения без предварительного уведомления. Проверьте информацию на наличие ошибок. Убедитесь, что информация актуальна.

OSRAM